

BRI Card (PCI/PCIe)

Overview


Certified by ELASTIX™, our BRI card uses the same Cologne™ chipset as all the other manufacturers, yet costs less. It supports the EURO and US flavor ISDN (2B+D) circuits. Easy jumper settings allows for either ISDN lines or phones to be connected to the cards 2 or 4 ports.

Features

- 64 ms tail line echo cancellation powered by Octassic™
- 2 or 4 BRI ports interface
- Up to 8 simultaneous voice calls over 4 ISDN BRI lines
- Independently configure each port for TE or NT
- Conference bridge
- Onboard power feeding
- 4 independent RJ45 interfaces
- Point-to-point (TE/NT) and point-to-multipoint (TE/NT)
- Euro ISDN protocol stack
- Fully PCI 2.2/PCIe compliant
- Compatible with 5V and 3.3V PCI busses automatically detectable
- DTMF detection on all B-channels

Minimum Hardware Requirement

- Dual Core Processor
- 2GB RAM
- Available PCI/PCI-e Slot

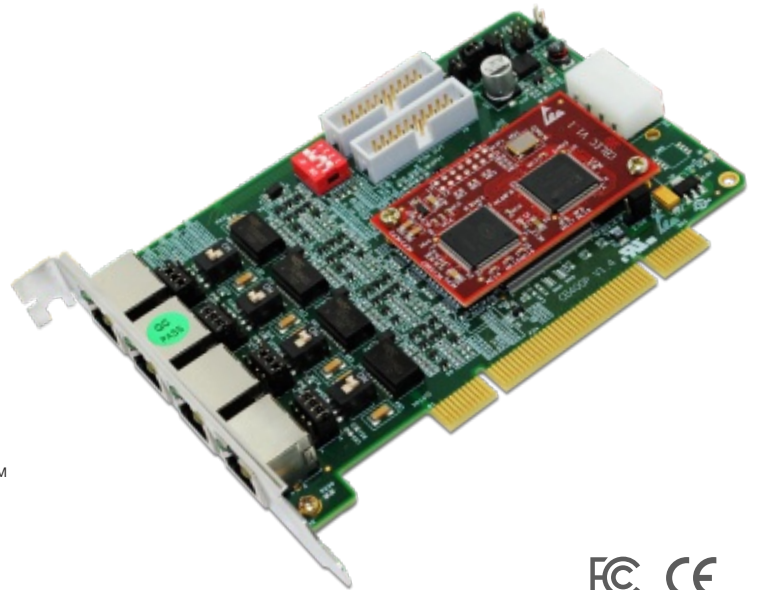

Certified by



Also works with



Product Models

| | |
|--|--|
| aCB2 - 2 PORT BRI PCI card | aCB4 - 4 PORT BRI PCI card |
| aCB2e - 2 PORT BRI PCIe card | aCB4e - 4 PORT BRI PCIe card |
| aCB2eL - 2 PORT BRI PCIe card + LEC | aCB4eL - 4 PORT BRI PCIe card + LEC |
| aCB2L - 2 PORT BRI PCI Card + LEC | aCB4L - 4 PORT BRI PCI card + LEC |

Operation temperature: 0°C to 50°C
Storage Temperature: -40°C to 125°C
Dimensions: 15.4cm x 8.7cm x 1.8cm
Weight: 102g*

Warranty Info

5 Years Hardware warranty.